



2 motors connector to one Dupon Connector 2X4Pin 2.54mm

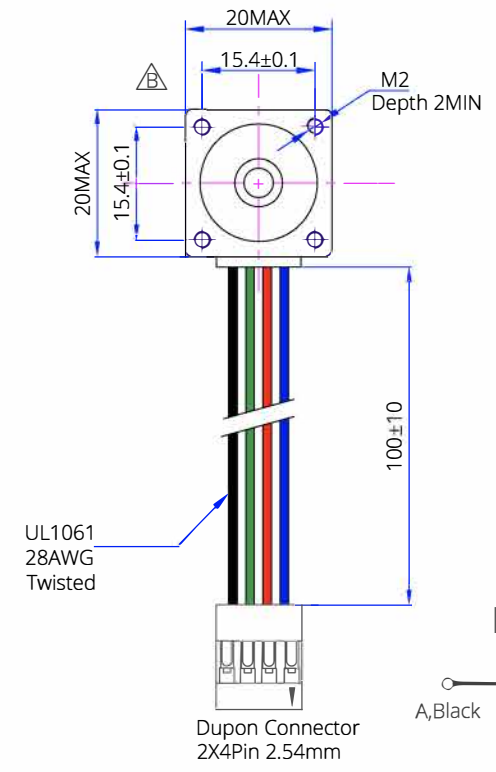

DIAGRAM



Items	Specification	Items	Specification
Phase Number	2	Step Angle	$1.8^\circ \pm 5\%$
Rated Voltage	DC 1.92V / Phase	Rated Current	DC 0.6A / Phase
Phase Resistance	$3.2 \times (1 \pm 10\%) \Omega$	Phase Inductance	$0.9 \times (1 \pm 20\%) \text{mH}$
Holding Torque	14mN-m MIN	Detent Torque	2 mN-m REF.
Rotation Direction	A-AB-B CW	Insulation Resistance	100Mohm(DC500V)
HI-POT	AC600V/1mA/1S	Insulation Class	Class B 130°C
Rotor Inertia	2.5g-cm^2	Weight	60 g REF

REV.	ECN NO.	DESCRIPTION	MADE BY	APPR. BY	DATE
B	---	Mounting Hole Space	Xu SD	J.B.	2/19/21
A	---	NEW RELEASE	Xu SD	J.B.	12/28/20

	VIEW	 SCALE NA	LDO Motors Co., Ltd.		
	Part NO.		1.8° NEMA8 Stepper Motor With Hollow Shaft ASSY LDO-205TH28-0604B7HS-2A		
DRAWN BY Xu SD	CHECKED BY J.B.	APPR. BY J.B.	DATE 12/28/20	FACTORY CODE	SHEET NO. 1/1